

"SUB SEA" PRESSURE GAUGES, TYPE PBX-SS-CD

TYPE PBX-SS-CD, with compensation diaphragm - max. 2500 metres

CASE : \varnothing 100 mm - bayonet lock, AISI316/1.4401,
100 % GLYCERINE FILLED

WETTED PARTS : bourdon tube + connection AISI316Ti/1.4571

WINDOW : armoured glass 4 mm

DIAL : aluminium, black figures on white

POINTER : aluminium, black

CONNECTION : 1/2" BSP or 1/2" NPT


RANGE : 0-1 upto 0-60 bar, acc. to EN 837-1
for higher ranges see page 55 (max. 1600 bar)

ACCURACY : $\pm 1.0\%$ F.S. / class 1

MOVEMENT : AISI304/1.4301

APPLICATION : for operating at great depths of sea water

OPTIONS : see page 57-58

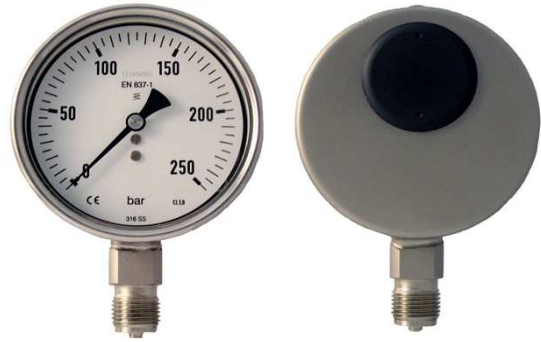

TYPE	MODEL CD "compensation diaphragm"	DIMENSIONS	UNIT PRICE
A		PBX-SS-CD100LA	
		DIM	mm
		A	101,5
		B	51
		C	19
		E	88
		T	20
HEX	22		
B		PBX-SS-CD100LB	
		A	101,5
		B	54,5
		D	132
		E	88
		H	4,8
		J	22,5
		L	121
		P	116
		T	20
HEX	22		
C		PBX-SS-CD100LC	
		A	101,5
		B	51
		C	33
		E	92
		T	20
D		PBX-SS-CD100LD	
		A	101,5
		B	38
		C	19
		D	132
		E	88
		H	4,5
		P	116
		T	20
		HEX	22
J		PBX-SS-CD100LJ	
		A	101,5
		B	38
		C	33
		D	132
		E	79
		H	4,5
		P	116
		T	20
		HEX	22